INSTRUCTIONS

BARISTA TOOLS


Black wood kit mounting instructions
for LELIT Bianca PL162T all models.

PL162T

Please read the following instructions carefully, if you have the necessary tools and knowledge to do the listed operations proceed step-by-step, otherwise please contact an authorized service centre.

BEFORE STARTING THE PROCEDURE, make sure that the machine is disconnected from the electrical mains and that it is not at high temperature to avoid risk of burns.


The maple wood components are delicate, therefore please use only tools and procedures indicated in the instruction.

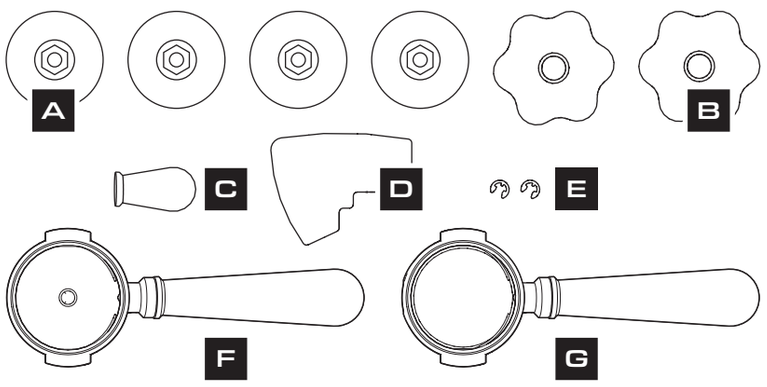

KIT PARTS

- **A** Adjustable black wood feet (4pcs)
- **B** Black wood knobs (2pcs)
- **C** Black wood group lever knob
- **D** Black wood paddle
- **E** Ring (2pcs)
- **F** Filterholder with coffee slide and black wood handle
- **G** Bottomless filterholder with back wood handle

HOW TO REPLACE THE PADDLE D

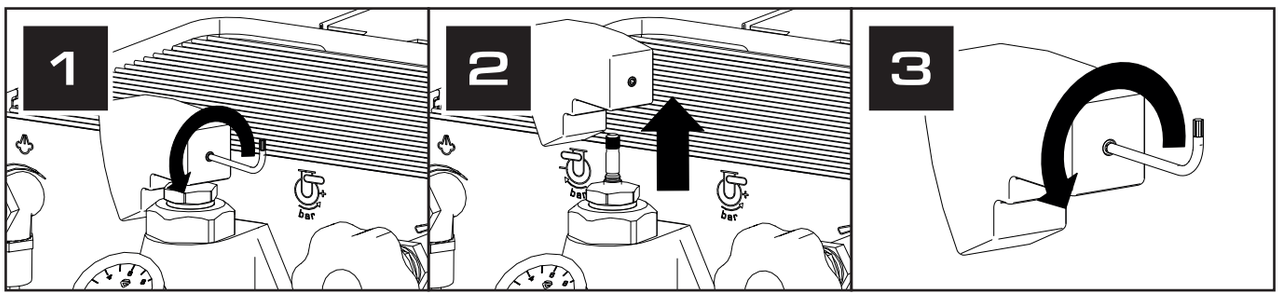

Turn the paddle completely to the left and use an Allen key (CH2) to unscrew the fixing screw.

Remove the paddle by lifting it up; should this operation require some effort, unscrew a bit more the fixing screw and remove the part gently.

Take the new paddle and use the Allen key (CH2) to make sure that the fixing screw is not too tight, otherwise loosen the fixing screw.


Follow us on **YouTube**

LELIT.COM


©2024 LELIT srl. All Rights Reserved

INSTRUCTIONS

BARISTA TOOLS

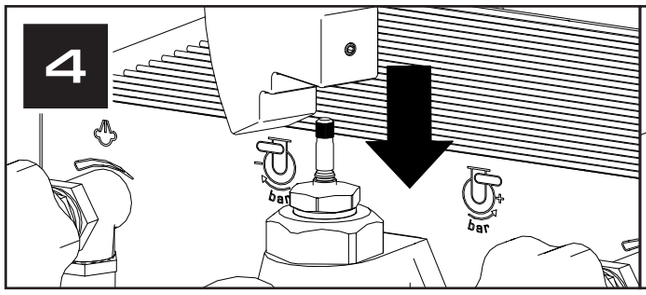


Keep the black wood paddle turned completely to the left and insert it in its place.

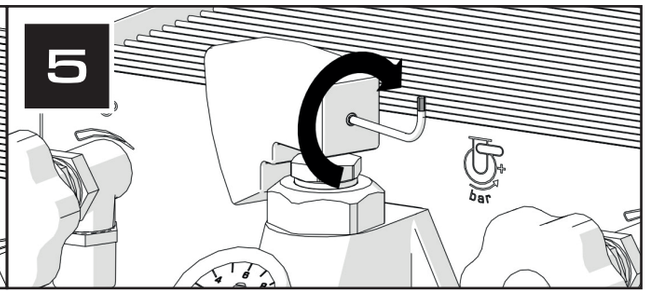


Use the Allen key (CH2) to fix the paddle.

HOW TO REPLACE THE GROUP LEVER KNOB C

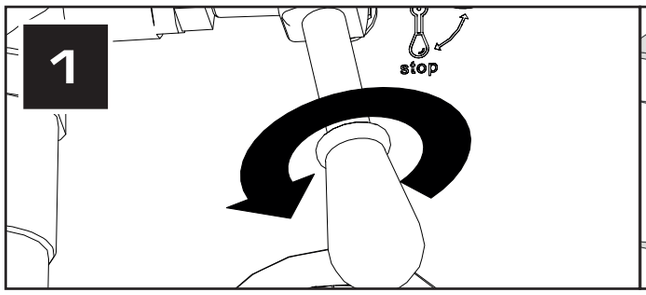


Remove the lever knob by unscrewing the piece manually.

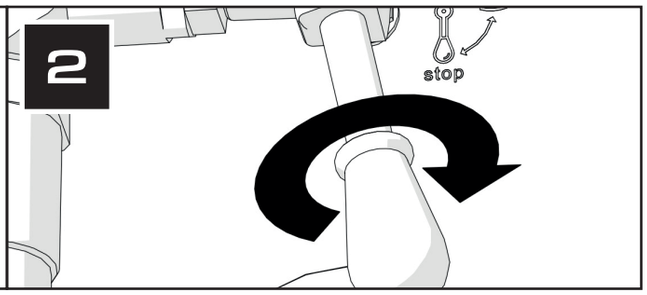


Insert the new group lever knob and screw it in manually.

HOW TO REPLACE THE FEET A

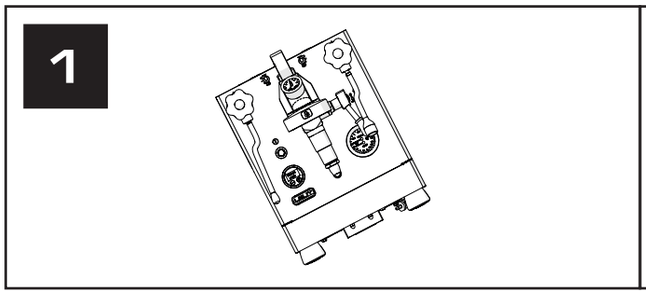

Incline the machine.

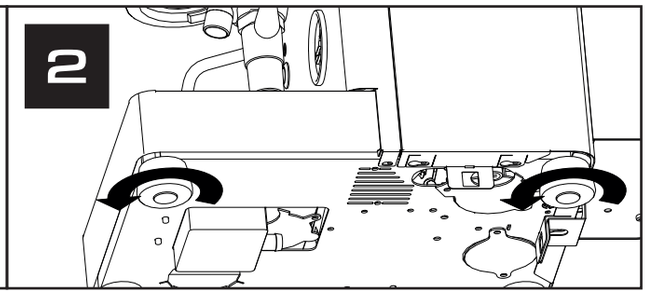

Unscrew the 2 feet on the raised side.


Follow us on **YouTube**

LELIT.COM

©2024 LELIT srl. All Rights Reserved

INSTRUCTIONS

BARISTA TOOLS

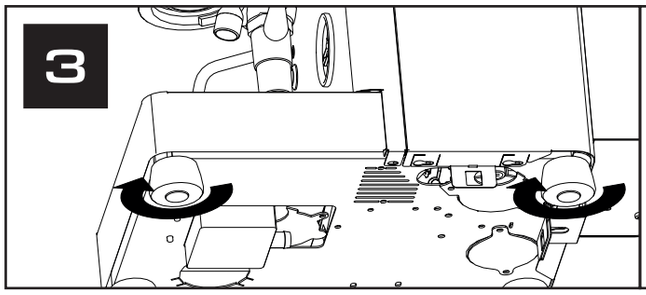


Screw in the 2 new wood feet and fix them manually.


4 Repeat the operation on the opposite side.

5 Once you have replaced the 4 feet, you can eventually adjust the height of the feet to ensure the stability of the machine.


HOW TO REPLACE THE KNOBS B

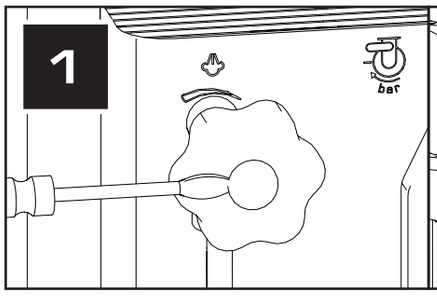


Use a small flat-blade screwdriver to remove the chromed cap placed in the centre of the knob.

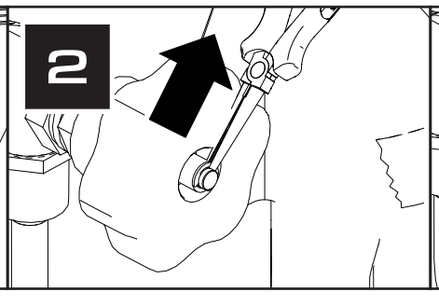


Use a long nose pliers to remove the metal ring.

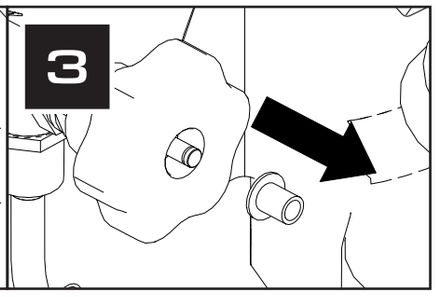


Remove the brass spacer manually.

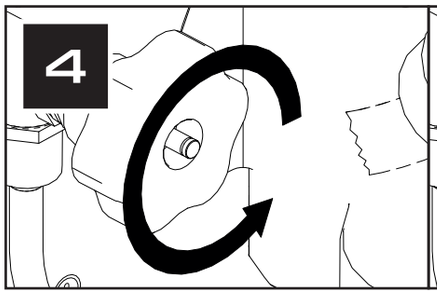

Remove the wood knob by unscrewing it manually.

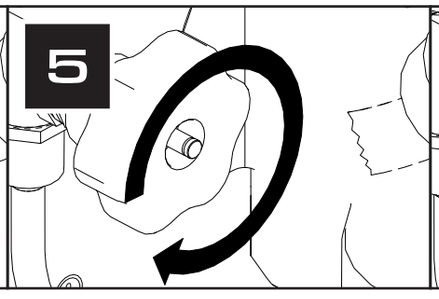

Screw in the new wood knob.

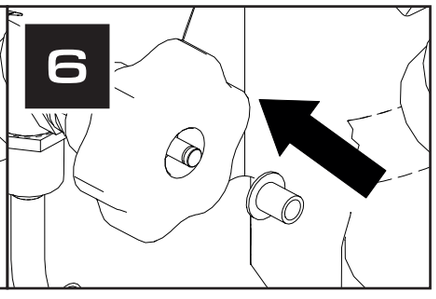

Re-position the brass spacer.


Follow us on **YouTube**

LELIT.COM


©2024 LELIT srl. All Rights Reserved

INSTRUCTIONS

BARISTA TOOLS

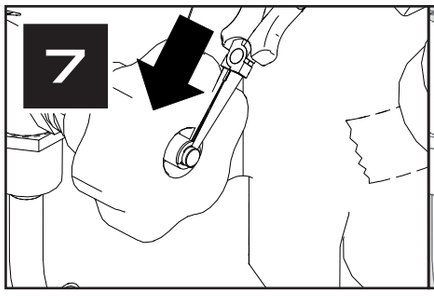

Take the metal ring E found inside the kit and use a long nose pliers to insert it into the special guide.

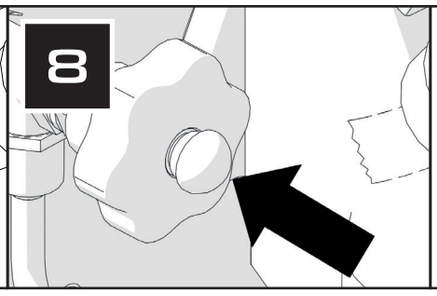

Re-position the chromed cap.

9

Repeat the operations to replace the 2nd knob.

Follow us on **YouTube**

LELIT.COM

©2024 LELIT srl. All Rights Reserved